

MAGNUS

Step-Up Transformer



MAGNUS



Step-up transformer

When power systems are put into operation or when faults occur, it becomes necessary to check the instrument transformers to make sure that they are providing test instruments and protective relay equipment with the correct outputs.

MAGNUS™ permits you to prepare excitation curves for instrument transformers quickly and easily.

MAGNUS is also used to demagnetize current transformer cores and to conduct turn-ratio tests on voltage transformers. Even though it weighs only 16 kg (35 lbs), it provides 1 A at 2.2 kV. Two-hand control enhances personal safety.

As standard, MAGNUS is delivered with a special high-voltage cable and a robust transport case.


Application example

IMPORTANT

Read the User's manual before using the instrument.

Prepare an excitation curve

1. Connect MAGNUS to the secondary side of the current transformer being tested and also to an ammeter and voltmeter.
2. Increase the voltage with the dial.
3. Jot down the values of U (voltage) and I (current).
4. Repeat steps 2 and 3 until the current (I) rises sharply without any significant rise in voltage (U).
5. Conclude the test by reducing U (voltage) slowly to zero, thereby providing demagnetization.

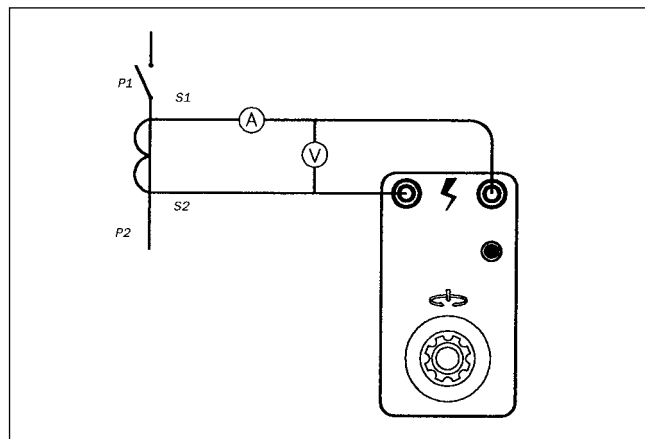

Specifications MAGNUS

Specifications are valid at nominal input voltage and an ambient temperature of +25°C, (77°F). Specifications are subject to change without notice.

Environment

Application field The instrument is intended for use in high-voltage substations and industrial environments.

Temperature

Operating 0°C to +50°C (32°F to +122°F)

Storage & transport -40°C to +70°C (-40°F to +158°F)

Humidity 5% – 95% RH, non-condensing

CE-marking

LVD Low Voltage Directive 73/23/EEC am. by 93/68/EEC

EMC EMC Directive 89/336/EEC am. by 91/263/EEC, 92/31/EEC and 93/68/EEC

General

Mains voltage 115/230 V AC, 50/60 Hz

Power consumption 2300 VA (max)

Protection Thermal cut-outs

Dimensions

Instrument 356 x 203 x 241 mm
(14" x 8" x 9.5")

Transport case 610 x 290 x 360 mm
(24" x 11.4" x 14.2")

Weight 16.3 kg (35.9 lbs)
26.7 kg (58.9 lbs) with accessories
and transport case

High voltage cables 2 x 5 m (16.4 ft) / 1,5 mm², 15 kV

Measuring outputs

Voltage 100/1, (max load of 1 MΩ)

Inaccuracy ±1,5%

Current 10/1

Inaccuracy ±1,5% at 2 A output current
±3% at 0,5 A output current

Outputs

Voltage outputs, AC

230 V mains voltage

(I) High voltage output ¹⁾ 0 – 2200 V AC

(II) Variable transformer, 0 – 250 V AC
not isolated from
mains ¹⁾

Voltage	Current	Max. load time	Rest time
2200 V AC	1 A	30 s ²⁾	10 minutes ²⁾
250 V AC	6 A	Continuous	–

115 V mains voltage

(I) High voltage output ¹⁾ 0 – 2000 V AC

(II) Variable transformer, 0 – 110 V AC
not isolated from
mains ¹⁾

Voltage	Current	Max. load time	Rest time
2000 V AC	1 A	30 s ²⁾	10 minutes ²⁾
110 V AC	10 A	Continuous	–

1) The outputs I and II must not be loaded at the same time.

2) The load time and rest time for the high voltage output is calculated at the maximum output voltage and current. During an excitation test the voltage and current is only at their maximum level at the end of the test.

Ordering information

Art.No.

MAGNUS

Complete with:
Cable set GA-00090
Transport case GD-00182

Magnus 115 V mains voltage

BT-11190

Magnus 230 V mains voltage

BT-12390



Cable set GA-00090

NOTICE OF COPYRIGHT & PROPRIETARY RIGHTS

© 2008, Programma Electric AB. All rights reserved.

The contents of this document are the property of Programma Electric AB. No part of this work may be reproduced or transmitted in any form or by any means, except as permitted in written license agreement with Programma Electric AB.

Programma Electric AB has made every reasonable attempt to ensure the completeness and accuracy of this document. However, the information contained in this document is subject to change without notice, and does not represent a commitment on the part of Programma Electric AB.

TRADEMARK NOTICES

Megger® and Programma® are trademarks registered in the U.S. and other countries.

All other brand and product names mentioned in this document are trademarks or registered trademarks of their respective companies.

Programma Electric AB is certified according to ISO 9001 and 14001.



Programma Electric AB
Eldarvägen 4
Box 2970
SE-187 29 TÄBY
Sweden

T +46 8 510 195 00
F +46 8 510 195 95
info@programma.se
www.programma.se