

## Test, monitor and analyse your electrical power, even on disturbed networks (AC+DC)

**DC and AC (~) single and  
three-phase balanced**

**1 kA AC/DC / 1.5 kA peak**

**600 V AC/DC / 1.5 kV peak**

**600 kW AC/DC, VA or var**

**Harmonics up to  
the 25th order**

*Other model: F 23  
for AC networks*



**IEC 1010-2-032. 600 V Cat III**

**Perfectly designed for maintenance and monitoring of electrical installations (AC + DC). This worksite tool, easy to handle and simple to use, offers rapid analysis of your power measurements and disturbances.**

- Large display with backlighting. Simultaneous reading of 3 values (3 x 10 000 counts)
- True RMS voltage and current in AC, AC + DC or DC mode
- Wattmeter: power factor and displacement power factor
- Harmonic Distorsion order by order
- Measurements on transformers: K and CBEMA\* factors
- RS 232 optical output and software for printing or processing on PC

\* Derating factor of a transformer as a function of harmonic distortion

2 models for your power and harmonic measurements			
Measurements		F23	F27
Currents and voltages (True RMS)	AC	●	●
	AC+DC		●
	DC <sup>(1)</sup>		●
Ripple rate			●
Peak and smoothed values		●	●
Crest factor		●	●
Frequency		●	●
Active, reactive and apparent power (balanced single-phase and 3-phase currents)	AC	●	●
	AC+DC		●
	DC <sup>(1)</sup>		●
Power factor		●	●
Displacement power factor		●	●
K and CBEMA <sup>®</sup> factors			●
Total Harmonic Distorsion		●	●
Harmonic distorsion order by order			●
Optical RS 232 output and software <sup>(3)</sup>			●

(1) Auto zero adjustment on DC

(2) Derating factor of a transformer as a function of harmonic distorsion


(3) For recording and processing the results on a PC

Specifications of the F27 clamp	
Three-function display	3 x 10 000 counts
Current (True RMS)	300 mA...1000 AAC/DC (1500 A peak)
Clamping	cable Ø 50 mm or busbar 80 x 5 mm
Voltage (True RMS)	50 mV...600 V AC/DC (1500 V peak)
Peak value (PEAK)	PEAK "+" or "-" (2 ms)
Crest factor (CF)	1 ... 10
Ripple rate (RIPPLE)	2 % ... 1000 %
Frequency	0.5 Hz ... 20 kHz
Active power	10 W ... 600 kW AC/DC
Reactive power	10 var ... 600 kvar AC/DC
Apparent power	10 VA ... 600 kVA AC/DC
Power factor (PF)	0 ... 1
Displacement power factor (DPF)	-1 ... +1
K factor (KF)	1 ... 30
CBEMA factor (THDF)	0.2 ... 1
Total Harmonic Distorsion or order by order to the 25th	absolute value (A or V) or relative value (%) of THD and DF
Total Harmonic Distorsion (THD)	0.2 ... 600 %
Distorsion factor (DF)	0.2 ... 100 %
Record (RECORD)	min, max and average value
Smoothed value (SMOOTH)	over 3 s
Display hold (HOLD)	available for every function
Monitoring (SCAN mode)	programmable rate: 1 to 60 min.
RS 232 optical output	configurable (PRGM function)

### To order

<b>F 27 clamp</b> .....	<b>P01.1207.57</b>
• Shipped in a carrying case with a set of 2 leads with prods, 2 voltages leads, 2 crocodile clips, a RS 232 optical output adapter and software, 4 batteries 1.5V, a mini reference guide and a user manual.	
<b>Spares</b>	
• Set of 2 leads n°181 A/B .....	<b>P01.2950.84</b>
• Set of 2 crocodile clips IEC 1010 .....	<b>P01.1018.14</b>
• Set of 4 batteries 1.5V (LR6) .....	<b>P01.1007.59</b>
• Carrying case MLT 101 .....	<b>P01.2980.17</b>
• CA transfert 2 software .....	<b>P01.1019.08A</b>

The F27 clamp-on ammeter is shipped in a carrying case with leads and crocodile clips, RS 232 output adapter and software operating under Windows.

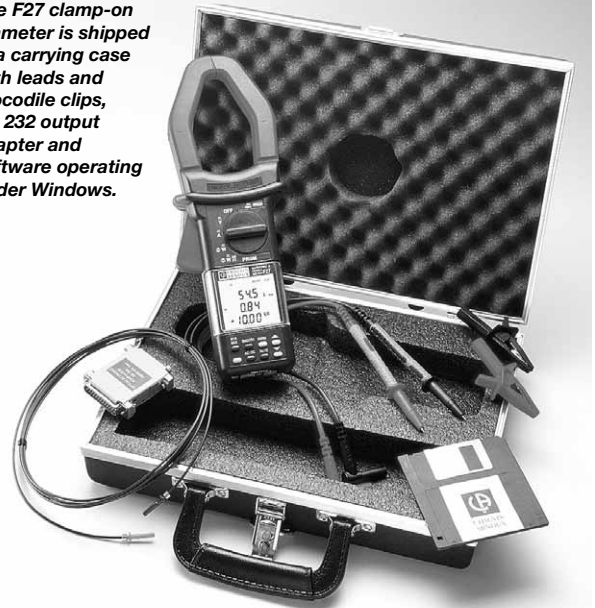

### Electrical safety

- Conforms to IEC 1010-1 standards
  - double insulation
  - installation category III
  - Degree of pollution 2
  - service voltage 600 V

### Conformity with other international standards

- EMC (to IEC 1000-4)
- Resistance to drops, shocks, vibrations (IEC 68.2)
- Watertightness: protection index IP 40 (to IEC 529)

### Power supply

- 4 alkaline batteries 1.5 V (type LR6)
- Battery life: 40 hours  
(battery status indicated on the display)
- Low battery indicator

### Climatic conditions

- Operating temperature: -10°C to +55°C
- Relative humidity: 0 to 90 % RH to 40°C
- Storage temperature: -40°C to +70°C

### Dimensions and weight

- Clamp: 275 x 103 x 50 mm - 670 g with the batteries
- Carrying case: 320 x 250 x 90 mm - 770 g

### Your distributor

FRANCE  
Chauvin Arnoux  
190, rue Championnet  
75876 PARIS Cedex 18  
Tel: +33 1 44 85 44 86  
Fax: +33 1 46 27 95 59  
export@chauvin-arnoux.fr  
www.chauvin-arnoux.fr

UNITED KINGDOM  
Chauvin Arnoux Ltd  
Waldeck House - Waldeck Road  
MAIDENHEAD SL6 8BR  
Tel: +44 1628 788 888  
Fax: +44 1628 628 099  
info@chauvin-arnoux.co.uk  
www.chauvin-arnoux.co.uk

MIDDLE EAST  
Chauvin Arnoux Middle East  
P.O. BOX 60-154  
1241 2020 JAL EL DIB (Beirut)  
Tel: +961 1 890 425  
Fax: +961 1 890 424  
camie@chauvin-arnoux.com  
www.chauvin-arnoux.com

 **CHAUVIN  
ARNOUX**  
GROUP